



Introducing Bacchus Self Contained Systems



Package Units

EWKL SERIES

Bacchus now offers package units for rooms up to 2000 cubic ft. Both beige (standard) and black (upgrade) units are available. They are designed to, when installed in a properly constructed enclosure, provide a constant, selectable temperature between approximately 48°F and 63°F while providing relative humidity of 50% to 75%. Features include:


- Large, easy to read, green LED display.
- Accurate, easy to adjust (no tools needed), readable set points with continuous reading of enclosure temperature or displaying of set point when changing enclosure temperatures.
- Power outage protection, which delays unit start up after power outages.
- Blocked airflow protection, which shuts down unit and protects wine in case of high temperatures caused by condenser blockage.
- Optional bottle probe.



Beige Units



Black Units

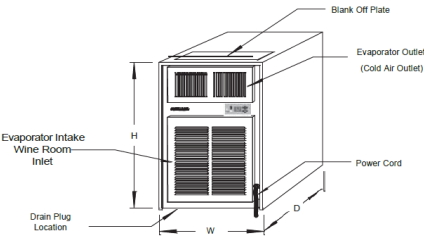

EWKL air intake and exhaust diagram

SIZING GUIDE & SPECIFICATIONS

This guide to be used only for enclosures meeting the above construction requirements.

Model	Enclosure Volume	Electrical	Dimensions (inches)	Weight
EWKL 1060	140 cu.ft.	3 Amp	14.25W x 13.25H x 16.38D	45 lb.
EWKL 2200	265 cu.ft.	4 Amp	14.25W x 13.25H x 16.38D	55 lb.
EWKL 3000	650 cu.ft.	5 Amp	14.25W x 19.75H x 21.63D	76 lb.
EWKL 4000	1000 cu.ft.	7 Amp	14.25W x 19.75H x 21.63D	81 lb.
EWKL 6000	1500 cu.ft.	9.5 Amp	16.25W x 22.00H x 21.63D	101 lb.
EWKL 8000	2000 cu.ft.	10 Amp	16.25W x 22.00H x 21.63D	101 lb.

Note: All units are 115 Volt, 60 Hz.

Cabinet Units


EWKCE SERIES

For cabinet and credenza applications, the EWKCE series provides a unit that discharges cold air out of the bottom of the unit. The units are rated for 140 cubic ft and 265 cubic ft respectively. When installed in a properly constructed enclosure, the unit provides a constant, selectable temperature between approximately 48°F and 63°F while providing relative humidity of 50% to 75%. Features include:

- Large, easy to read, green LED display.
- Accurate, easy to adjust readable set points with continuous reading of enclosure temperature or displaying of set point when changing enclosure temperatures.
- Power outage protection, which delays unit start up after power outages.
- Blocked airflow protection, which shuts down unit and protects wine in case of high temperatures caused by condenser blockage.
- Optional bottle probe.



optional bottle probe

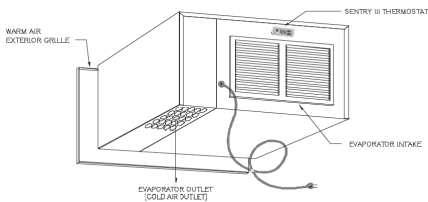

EWKCE air intake and exhaust diagram

SIZING GUIDE & SPECIFICATIONS

This guide to be used only for enclosures meeting the above construction requirements.

Model	Enclosure Volume	Electrical	Dimensions (inches)	Weight
EWKCE 1060	140 cu.ft.	3 Amp	18W x 13.25H x 16.38D	45 lb.
EWKCE 2200	265 cu.ft.	4 Amp	18W x 13.25H x 16.38D	55 lb.

Note: All units are 115 Volt, 60 Hz.



Bacchus Cellar Systems
Vandalia, OH
Phone: 937.665.0424
www.bacchuscellarsystems.com

